

**SPECIALTY
CONTROL VALVES
FOR UREA PLANTS**

KOSO PARCOL S.r.l. a socio unico

Sede legale: Via Isonzo, 2, 20010 Canegrate (Milano) ITALY

Partita IVA e Codice Fiscale 09684900963

Cap. Soc. €110.000,00 | R.E.A. MI - 2106767

Phone: +39 0331 413111 | Fax: +39 0331 404 215

VECTOR

kentintrol™

REX

**KOSO
HAMMEL DAHL**

OUTLINE

PARCOL has started the production of specialty control valves for urea plants in 1965; at present, approximately 200 production units where Parcol valves are installed run with full satisfaction.

1-4800 and 1-2311 series control valves are designed and manufactured so as to grant good service and longer trouble free life with very reduced maintenance. The original and simple design of PARCOL valves as well as the right selection of the part materials result in great success of the same.

Materials are adequate for urea and carbamate fluids and comply with the material specifications for this service of main Licensors such as Snamprogetti, Stamicarbon, Urea Casale and others.

Connections are obtained directly on the single piece that constitutes the valve body in order to keep down the weight, whereas the shape of internals does not leave dead zones. In fact dead zones are a cause for corrosion since carbamate strengthens its corrosive action particularly in these zones due to the failure of oxygen protection (passivation).

GENERAL SPECIFICATIONS

To avoid any problems connected with corrosion caused by environmental conditions stainless steel is widely used for all valve and actuator components: all valve bodies and actuators bolting, body intermediate flanges, clamping nut or screws for fixing the actuators to the bodies, all external packing parts, brackets for installation of pneumatic and electric accessories, pneumatic tubing and fittings are always supplied in stainless steel.

1-4800 series high pressure, split body, angle control valve have one-piece upper body obtained from forged block of specialty stainless steel. Bonnet integral with the body so as to avoid flanged connection and dead zones, streamlined flow design, lenticular coupling between body and seat without the use of any gasket, one-piece plug and stem construction, special packing design and the use of particular trim materials, tested on various plants for many years, are the main features which make PARCOL urea control valves as top as regards quality and performances, at a reasonable price.

Likewise, 1-2311 high pressure butterfly control valves have one-piece body and disc obtained from forged block of specialty stainless steel and special packing design to warrant maximum reliability. Trim materials have been selected by testing on various urea plants for many years to ensure maximum reliability and performances.

4-3111 three way ball valve for urea plant application. Suitable with heating jacket and materials adequate for urea fluids.

Available valve series are:

- 1-4800: Contoured plug, split body angle control valve with three different models:
- 1-4827: General purpose control valve. (*typical services: CO₂ to reactor, reactor vent, carbamate, ammonia*).
- 1-4829: Contoured plug trim with intermediate packing washing. (*typical service: stripper letdown*).
- 1-4824: Multi stage, anti cavitation trim, (up to DN 6"). (*typical service: carbamate pump minimum recirculation flow*).
- 1-2311: High pressure swing through butterfly control valve. (*typical service: carbamate from reactor*).
- 1-2611: High pressure double eccentric butterfly control valve with metal-to-metal seal.
- 4-3111: Three ways ball valve (*typical service: urea melt to the prilling tower*).

Valves can be supplied with various types of actuators according to the required thrusts to guarantee smooth, long lasting and reliable operation, according to specified working conditions and service.


The most used actuators are Parcol pneumatic series 1-X-210 (linear) and 1-X-271 (rotary) with carbon steel yoke and side or top mounted handwheel.

For 1-4800 series, when the required thrust does not allow the use of diaphragm actuators, heavy duty pneumatic piston and spring opposed type, Parcol 1-X-430 series are available. On piston actuators worm gear side mounted handwheel or top mounted hydraulic manual override can be provided. 1-X-430 series piston actuators are of strong and particular design and construction so as to be supplied with instrument air without any lubrication. This guarantees a smooth and really continuous control duty through a pneumatic positioner without the addition of special relays.


In particular circumstances 1-4800 control valves are also supplied with electric actuators for remote and/or local operation for on-off and regulating service.



1-2311 SERIES

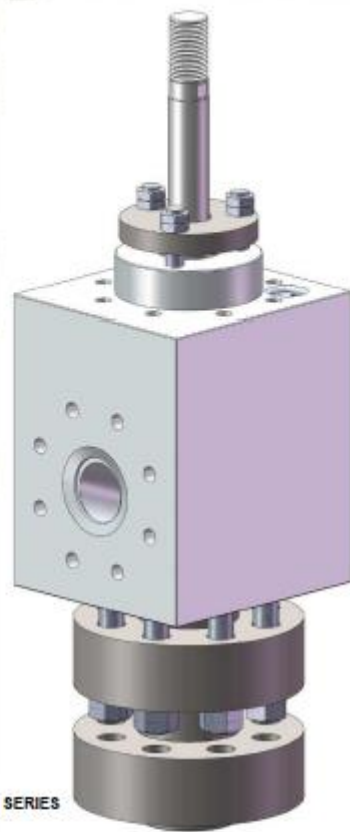


1-4800 SERIES

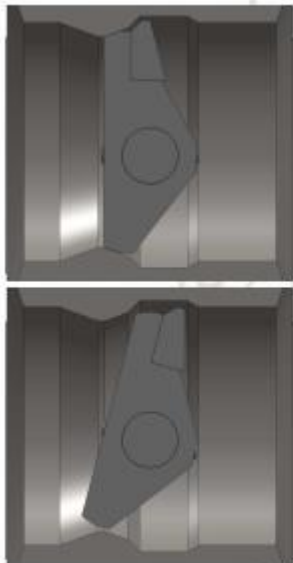


1-2611 Double eccentric vane detail



4-3111 SERIES

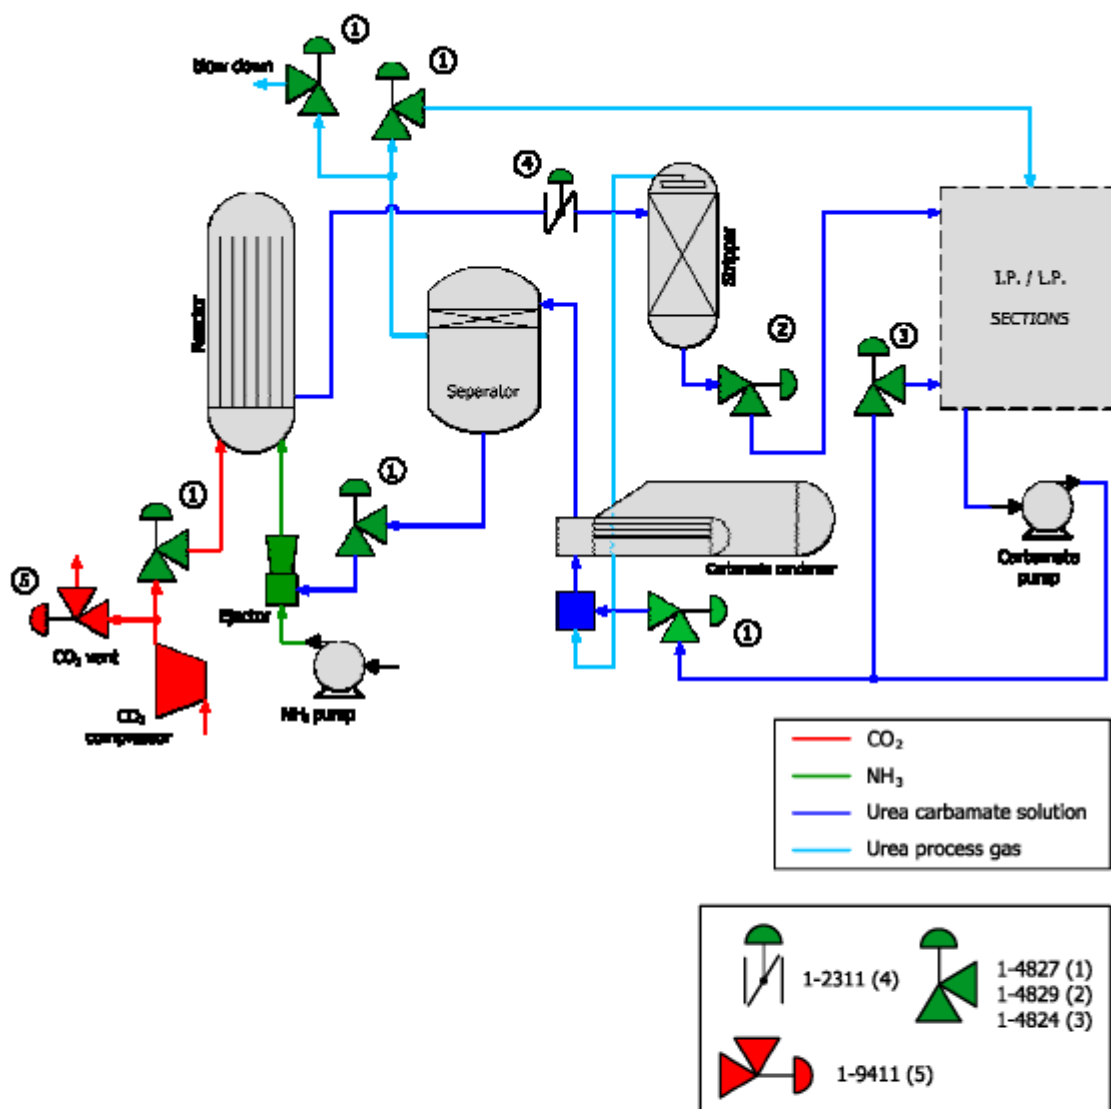

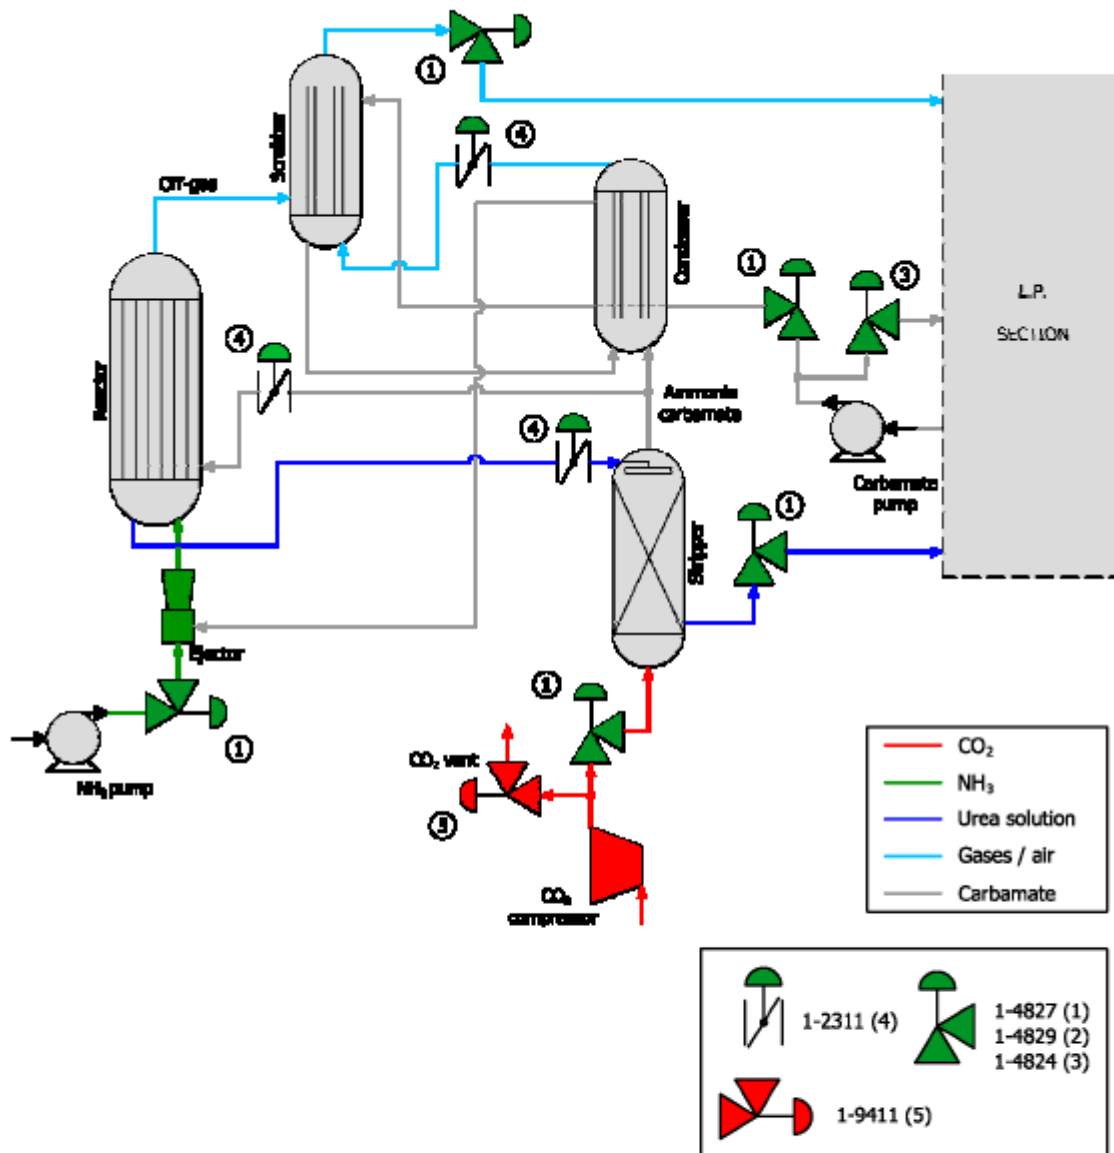


PARCOL


THE WORLD LEADER IN SEVERE SERVICE CONTROL VALVES FOR UREA PLANTS

- Technologically advanced and compact design.
- Proven experience on a large number of applications all over the world.
- Increased plant production due to high reliable valve performance and longer MTTM (Mean Time To Maintenance).
- Lowest overall costs due to:
 - easy maintenance, quick change trim, no screwed or welded seats;
 - long trim life;
 - Improved resistance to corrosion due to the absence of dead zones.
- Customized valve design to fit our valves in existing piping.
- Reduced leakage and system costs.

1-4800 SERIES SPLIT BODY ANGLE CONTROL VALVE

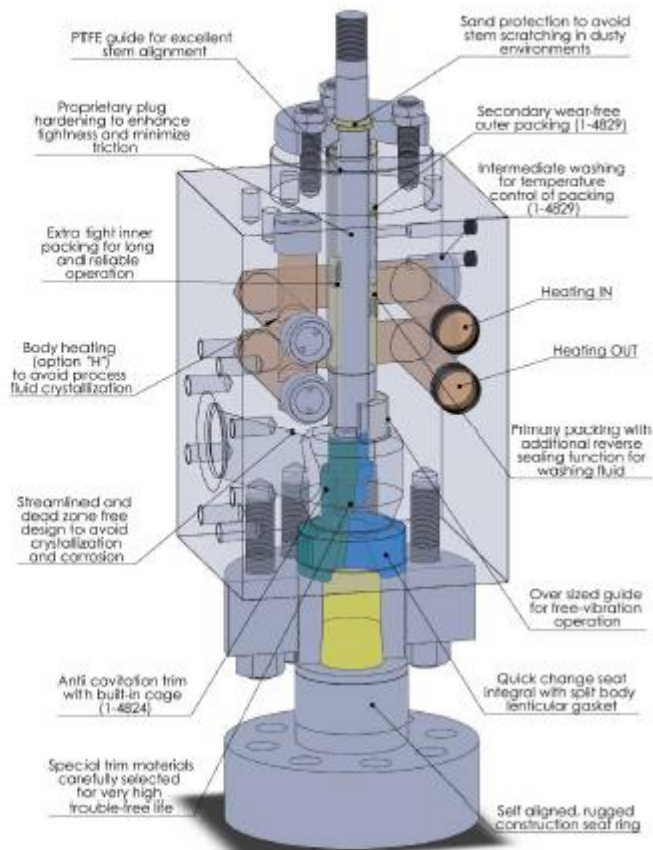

1-2311 SERIES ONE PIECE BODY BUTTERFLY CONTROL VALVE

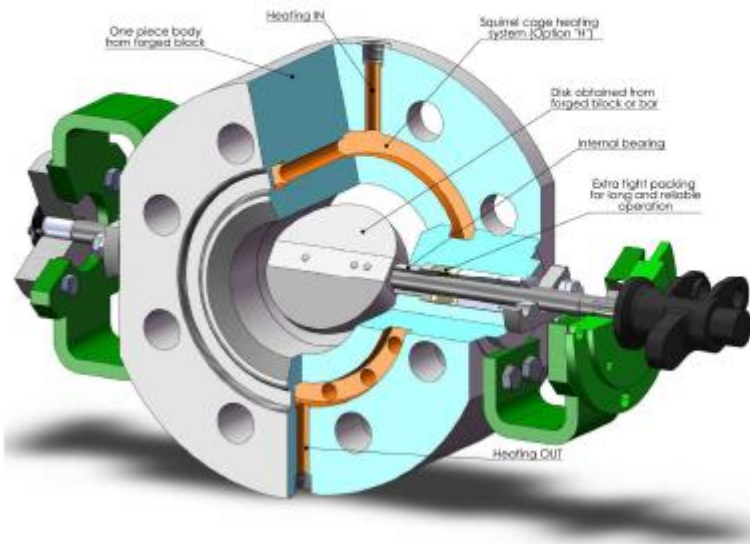

1-4800 SERIES MAIN SPECIFICATIONS


1-4827 (BASIC MODEL)

BODY

- Style: split body angle design, streamlining design with integral bonnet.
- Construction: from forged block only.
- Materials: ASTM A182 F316L, AISI 316L modified for urea service and specialty duplex stainless steel (25Cr22Ni2Mo modified for urea service).
- Connections: flanged ends and stud bolts with lens-type seal according to Customer's std., flanged DIN and ANSI standard.
- Pressure ratings: ANSI 900 to 2500, DIN and UNI PN 160 to 400.
- Packing box: bolted type for adjustable loading of glass filled PTFE V-rings seal.
- Options: steam heating, companion flanges with BW connection, etc.

PLUG

- Sizes: full or reduced ports as per Cv's table.
- Construction: unit machined and polished plug and stem for perfect alignment and long life.
- Shapes: piston, contoured and disk for equal percentage, linear and quick opening flow characteristic.
- Guiding: top and port for piston plug and top only for other types.
- Materials: special duplex stainless steel (HVD-1, Ferralium, etc.).
- Seat face design: metal seated only with leakage class IV or V according to IEC 60534-4 (ANSI B16.104).

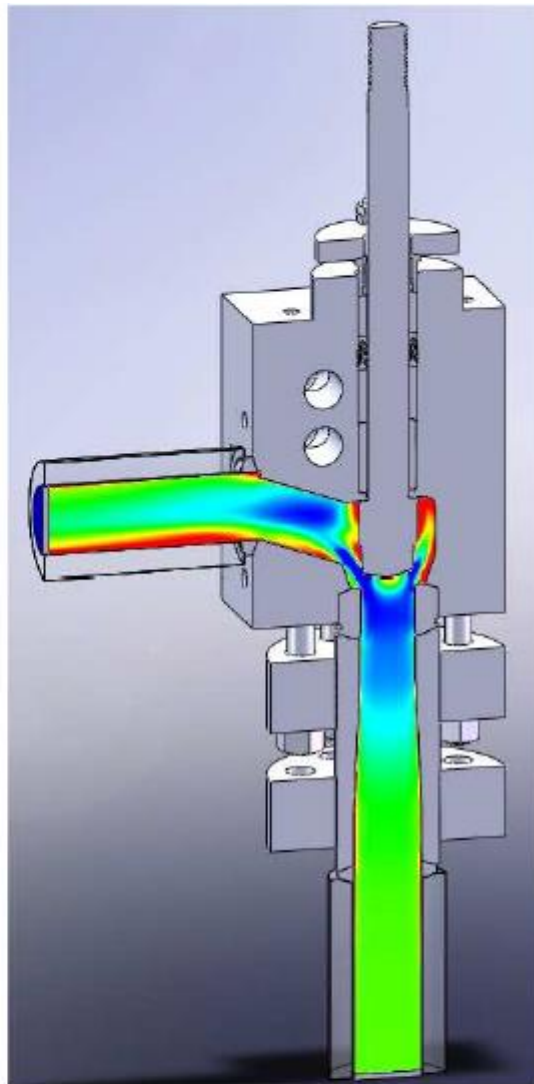

1-4800 SERIES CFD ANALYSIS

GUIDE BUSHING

- Style: long, heavy and precision fitted into the upper body.
- Materials: as per plug ones with different hardness.

SEAT

- Style: quick change seat integral with split body lenticular gasket.
- Materials: as per plug ones.

1-4829 (with PACKING WASHING)

Model 1-4829 control valves are similar to model 1-4827 but with a particular guide and packing design. As well known to instrument Engineers who work on urea plants, the crystallization of urea into packing box chamber result in detrimental effects both on integrity of packing sealing rings and polished surface of plug stem.

The combined effects of continuous washing device of upper part of packing box chamber with hot water at low pressure and special hardening and polishing of plug stem surface will avoid crystallization and packing leaks, and guarantee longer trouble-free-life of all trim and packing parts.

For main specifications please refer to the ones of model 1-4827 except for packing box construction with additional proprietary device for continuous washing of upper part of packing box chamber.

1-4824 (ANTI CAVITATION TRIM)

Model 1-4824 urea control valves are equal to model 1-4827 except for specialty multi stages trim expressly designed to avoid cavitation damages on high differential pressure services such as carbamate pump minimum recirculation flow.

Multi stage are realized on plug.



Last stage can be realized by a lenticular seat built-in cage.

Valve plug and drilled cage paths are designed in order to realize the most suitable expansion coefficient for any valve opening.




1-4827 SERIES VALVE WITH 1-X-212 PNEUMATIC DIAPHRAGM ACTUATOR AND COMPLETE WITH COMPANION FLANGES (OPTIONAL)

1-4827 series VALVE ASSEMBLY

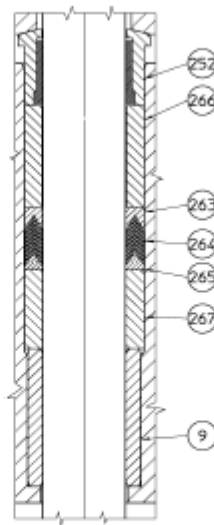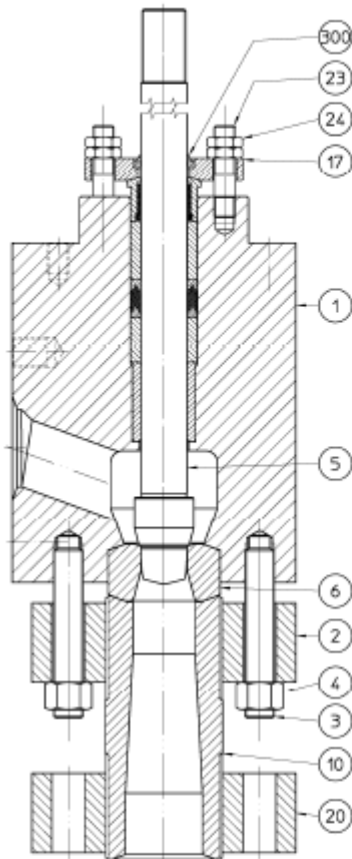

1-4827 AND 1-4824 PACKING DETAIL

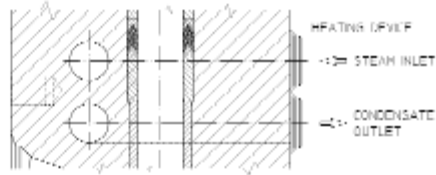



1-4827 AND 1-4824 HEATING DEVICE (OPTION H)

ITEM	PART NAME
1	BODY
2	FLANGE
3	STUD
4	NUT
5	PLUG (B)
6	SEAT (B)
9	GUIDE BUSHING
10	LOWER BODY
17	PACKING FLANGE
20	FLANGE


ITEM	PART NAME	
23	STUD	
24	NUT	
252	PACKING FOLLOWER	
263	HEAD RING	(A) (B)
264	SEALING RING	(A) (B)
265	PACKING END RING	(A) (B)
266	SPACER	
267	SPACER	
300	SCRAPER	(A) (B)

(A) STRATUP - COMMISSIONING SUGGESTED SPARE PARTS
 (B) STRATEGIC - TWO YEARS SUGGESTED SPARE PARTS

1-4829 series VALVE ASSEMBLY

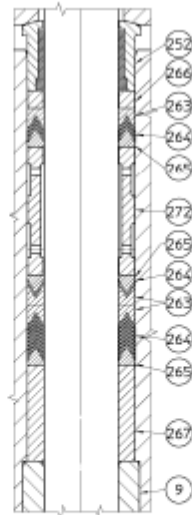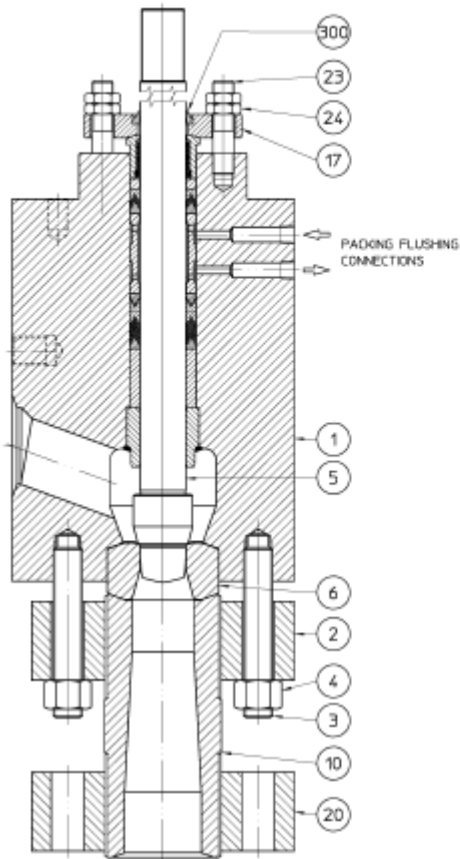

1-4829 PACKING DETAIL

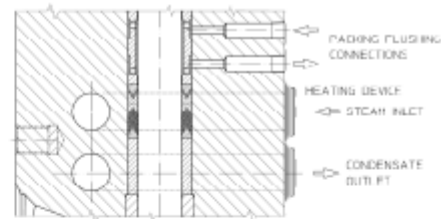

1-4829 HEATING DEVICE (OPTION H)

ITEM	PART NAME
1	BODY
2	FLANGE
3	STUD
4	NUT
5	PLUG
6	SEAT
9	GUIDE BUSHING
10	LOWER BODY
17	PACKING FLANGE
20	FLANGE

ITEM	PART NAME
23	STUD
24	NUT
252	PACKING FOLLOWER
263	HEAD RING
264	SEALING RING
265	PACKING END RING
266	SPACER
267	SPACER
272	FLUSHING FOLLOWER
300	SCRAPER

(B)

(B)

(A) (B)

(A) (B)


(A) (B)

(A) (B)

^(A) STRATUP - COMMISSIONING SUGGESTED SPARE PARTS

^(B) STRATEGIC - TWO YEARS SUGGESTED SPARE PARTS

1-4824 series VALVE ASSEMBLY

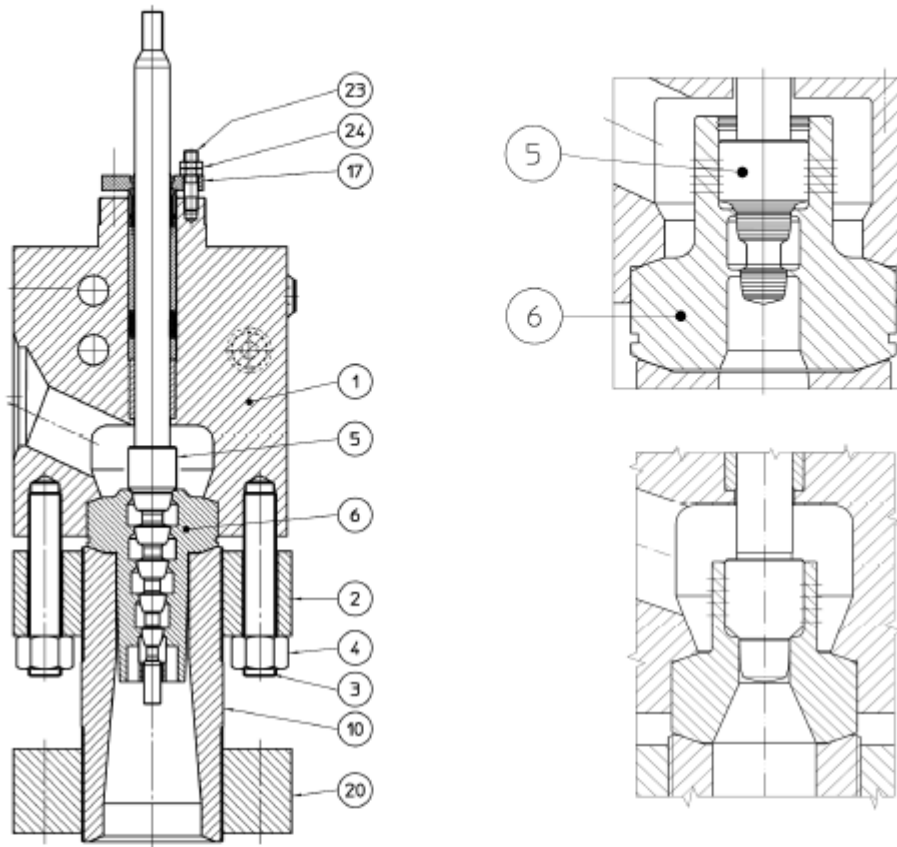

1-4824 MULTISTAGE PLUG DETAILS

ITEM	PART NAME
1	BODY
2	FLANGE
3	STUD
4	NUT
5	PLUG
6	SEAT
9	GUIDE BUSHING
10	LOWER BODY
17	PACKING FLANGE
20	FLANGE

ITEM	PART NAME
23	STUD
24	NUT
252	PACKING FOLLOWER
263	HEAD RING
264	SEALING RING
265	PACKING END RING
266	SPACER
267	SPACER
272	FLUSHING FOLLOWER
300	SCRAPER

(B)

(B)

(A) (B)

(A) (B)

(A) (B)

(A) (B)

(A) STRATUP - COMMISSIONING SUGGESTED SPARE PARTS
 (B) STRATEGIC - TWO YEARS SUGGESTED SPARE PARTS

1-4827 and 1-4829 FLOW COEFFICIENT Cv

DN in.	Port mm	Stroke mm	Regulating			On/Off	
			Travel 5%		Travel 100%	Travel 100%	
			FTO / FTC ⁽¹⁾	FTO	FTC	FTO	FTC
3/4	3	17	0,003	0,02	0,024	-	-
	4	17	0,011	0,05	0,06	-	-
	8	17	0,027	0,25	0,30	-	-
1	12	17	0,09	1,4	1,7	5,7	6,8
	15	17	0,18	6,3	7,6	7,8	10
	21	17	0,26	11	14	12	17
1.1/2	12	25	0,09	3,3	4,0	5,7	6,8
	15	25	0,18	7,7	9,4	9,0	11
	19	25	0,17	12	15	13	17
2	23	25	0,29	17	21	18	23
	12	25	0,09	3,6	4,4	5,7	6,8
	15	25	0,18	8,1	9,8	9,0	11
2	19	25	0,17	13	16	14	17
	23	34	0,29	19	23	21	25
	32	34	0,65	34	41	35	45
3	19	34	0,17	13	16	14	17
	23	34	0,29	18	22	21	25
	28	34	0,57	28	34	31	37
3	35	34	0,71	44	52	47	58
	47	34	1,24	74	89	69	89
	23	34	0,29	19	23	21	25
4	28	34	0,57	28	34	31	37
	35	34	0,71	44	53	48	58
	41	34	1,13	57	70	67	80
4	47	45	1,30	79	93	85	105
	60	45	1,82	122	147	124	159
	35	45	0,71	44	53	48	58
6	41	45	1,13	59	73	67	80
	47	45	1,30	79	96	87	105
	57	45	1,73	111	136	128	154
6	65	45	1,97	150	179	163	200
	86	60	3,49	247	297	251	324
	72	60	2,71	185	226	205	246
8	86	60	3,49	263	316	290	351
	97	76	3,94	328	392	353	440
	112	76	5,36	435	521	441	561
10	86	76	3,49	263	322	292	351
	97	76	3,94	335	409	372	446
	112	76	5,36	447	535	490	595
10	130	76	6,66	581	697	624	781
	148	76	7,58	748	898	760	971
	97	76	3,94	335	409	372	446
12	112	76	5,36	447	546	496	595
	130	76	6,66	601	719	658	801
	148	76	7,58	756	905	812	1.015
12	165	76	8,45	945	1133	960	1219



1-4827 series VALVE WITH ELECTRIC ACTUATOR

1-4827 and 1-4829 RECOVERY FACTOR F_L and PRESSURE DIFFERENTIAL RATIO FACTOR x_T

Travel	F_L		x_T	
	FTO	FTC	FTO	FTC
10%	0,94	0,80	0,83	0,51
100%	0,88	0,70	0,68	0,34

⁽¹⁾ FTO = Flow-To-Open; FTC = Flow-To-Close

1-4824 FLOW COEFFICIENT Cv

DN in.	Port mm	Stroke mm	Travel	
			5%	100%
1	15	17	0,18	4,4
	21	17	0,26	8,0
1.1/2	15	25	0,18	5,4
	19	25	0,17	8,7
	23	25	0,29	12
2	15	25	0,18	5,6
	19	25	0,17	9,0
	23	34	0,29	13
	32	34	0,65	24
3	19	34	0,17	9,0
	23	34	0,29	13
	28	34	0,57	20
	35	34	0,71	30
	47	34	1,24	52
4	23	34	0,29	13
	28	34	0,57	20
	35	34	0,71	30
	41	34	1,13	40
	47	45	1,30	55
	60	45	1,82	86
6	35	45	0,71	30
	41	45	1,13	42
	47	45	1,30	55
	57	45	1,73	78
	65	45	1,97	105
	86	60	3,49	173

1-4824 RECOVERY FACTOR FL

Travel	FL
10%	0,94
100%	0,955



1-4827 SERIES VALVE WITH 1-X-432 PNEUMATIC CYLINDER ACTUATOR PROVIDED WITH SIDE-MOUNTED HANDWHEEL (OPTIONAL)

1-4800 series MAX DIFFERENTIAL PRESSURE ACROSS THE VALVE Δp - bar ⁽¹⁾

DN in.	Port mm	Stroke mm	Parcol Pneumatic actuator	Direct action (air to close)				Reverse action (air to open)					
				Spring range	Supply	Max Δp (class IV) bar	Max Δp (class V) bar	Spring range bar	Supply bar	Max Δp (class IV) bar	Max Δp (class V) bar		
3/4	3	17	1-X-210 D390	6-30 psi	50 psi	325	325	15-30 psi	35 psi	310	310		
	4	17											
	8	17											
1	12	17	1-X-210 D390	6-30 psi	50 psi	325	325	15-30 psi	35 psi	310	310		
	15	17	1-X-210 D450							290	265		
	21	17	1-X-210 D450							300	285	235	215
1.1/2	12	25	1-X-210 D390	6-30 psi	50 psi	325	325	15-30 psi	35 psi	300	290		
	15	25	1-X-210 D450							290	270		
	19	25	1-X-210 D450							280	265		
	23	25	1-X-210 D450							250	235	195	180
2	12	25	1-X-210 D390	6-30 psi	50 psi	265	265	15-30 psi	35 psi	215	215		
	15	25	1-X-210 D450							280	265		
	19	25	1-X-210 D450							325	325	320	320
	23	34	1-X-210 D600							230	215	175	165
	32	34	1-X-210 D600							230	215	175	165
3	19	34	1-X-210 D600	6-30 psi	50 psi	325	325	15-30 psi	35 psi	320	320		
	23	34								295	280	230	215
	28	34								1-X-430 C450	1.5-3 bar	6 bar	325
	35	34	1-X-430 C450	1.5-3 bar	6 bar	220	215	2.5-4 bar	5 bar	185	175		
	47	34	1-X-430 C600	1.5-3 bar	6 bar	250	245	2.5-4 bar	5 bar	210	200		
4	23	34	1-X-210 D600	6-30 psi	50 psi	325	325	15-30 psi	35 psi	320	320		
	28	34								295	280	230	215
	35	34	1-X-430 C450	1.5-3 bar	6 bar	325	325	2.5-4 bar	5 bar	325	310		
	41	34								290	280	240	230
	47	45								220	210	185	175
	60	45								1-X-430 C600	250	245	210
6	35	45	1-X-430 C450	1.5-3 bar	6 bar	325	325	2.5-4 bar	5 bar	325	310		
	41	45								290	280	240	230
	47	45								205	205	170	170
	57	45	1-X-430 C600							275	270	230	225
	65	45								215	205	180	170
8	72	60	1-X-430 C600	1.5-3 bar	6 bar	175	170	2.5-4 bar	5 bar	-	-		

⁽¹⁾ Pressure drop values reported in the above table refer to valves equipped with Parcol pneumatic actuators

1-4800 series OVERALL DIMENSIONS (mm)

DN in.	Port mm	Stroke mm	Actuator	A	B	C		D	E	F	G	H	L	M	N	P	V	Z
						1-4824 1-4827	1-4829										1-4829	
1.1/2	12	25	1-X-210 D390	75	231	79	109	35	30,5	43,5	95	4	22	3/4"	28	6	78	90
	15		1-X-210 D450															
	19																	
	23																	
2	12	25	1-X-210 D390	90	265	89	131	45	39,3	53	110	4	25	7/8"	33	7	103	119
	15		1-X-210 D450															
	19																	
	23																	
	32	1-X-210 D600																
3	19	34	1-X-210 D600	115	313	155	188	60	58,4	79	145	8	25	7/8"	33	7	127	156
	23																	
	28																	
	35		1-X-210 D450															
	47																	
4	23	34	1-X-210 D600	135	410	157	185	75	77,2	103	185	8	32	1.1/8"	43	10	129	157
	28																	
	35																	
	41		1-X-430 C450															
	47																	
6	60	45	1-X-430 C800	165	525	193	223	100	116,4	152	255	8	41,5	1.1/2"	57	12	163	193
	35																	
	41																	
	47		1-X-430 C450															
	57																	
8	60	60	1-X-430 C800	205	638	205	265	120	153,1	198	320	8	51	1.7/8"	72	14	200	231
	72																	
	86																	
	97																	
	112		1-X-430 C600															
10	86	76	1-X-430 C800	235	755	240	278	140	190	241	380	8	55	2"	90	14	203	239
	97																	
	112																	
	130																	
	148																	
12	97	76	1-X-430 C800	280	897	288	288	186	232	292	485	12	48	1.3/4"	70	14	206	242
	112																	
	130																	
	148																	
	165																	


BODY HEATING and PACKING WASHING DETAILS (mm)

DN in.	CONNECTION	a	b	d	e	f	g	h	m
1.1/2	1/2" NPT	7	41	44	33	70	65	-	-
	1/2" ANSI 150/300 RF					-	-	123	118
2	1/2" NPT	16	52	55	37	80	75	-	-
	1/2" ANSI 150/300 RF					-	-	133	128
3	1/2" NPT	47	95	60	60	108	108	-	-
	1/2" ANSI 150/300 RF					-	-	153	153
4	1/2" NPT	52	100	78	70	133	128	-	-
	1/2" ANSI 150/300 RF					-	-	178	173
6	1/2" NPT	55	125	115	70	173	168	-	-
	1/2" ANSI 150/300 RF					-	-	218	213
8	1/2" NPT	75	145	150	85	213	203	-	-
	1/2" ANSI 150/300 RF					-	-	258	248
10	1/2" NPT	65	150	135	85	248	203	-	-
	1/2" ANSI 150/300 RF					-	-	293	248
12	1/2" NPT	88	168	150	90	295	238	-	-
	1/2" ANSI 150/300 RF					-	-	340	283

WEIGHTS (kg)

DN in.	1-4824 1-4827	1-4829
1.1/2	35	40
2	55	65
3	115	130
4	215	230
6	445	470
8	780	855
10	1060	1130
12	1870	1870

Above dimensions and weights refer to valves flanged PN 325 with lenticular gasket. Dimensions and weights can change depending on licensor applicable standards.

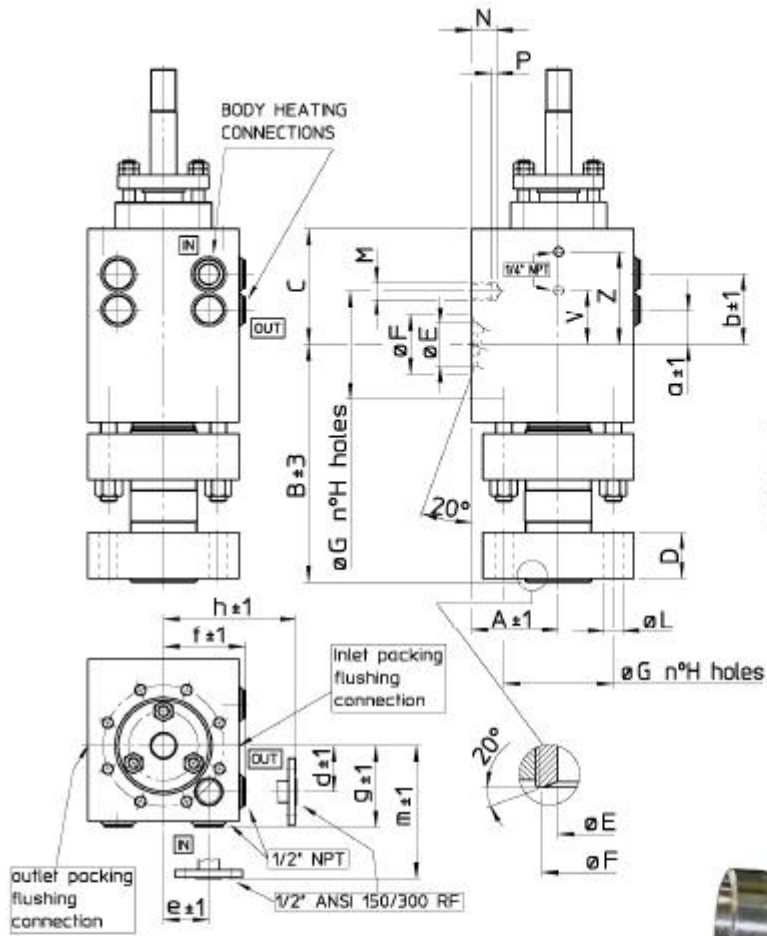

1-4827 SERIES VALVE DN 8" WITH
DOUBLE ACTING SPRING RETURN PNEUMATIC CYLINDER ACTUATOR
AND COMPLETE WITH COMPANION FLANGES (OPTIONAL)


1-2311 AND 1-2611 MAIN SPECIFICATIONS

BODY

- Style: swing-through type with threaded holes.
- Construction: from forged block only.
- Materials: specialty duplex stainless steel 25Cr22Ni2Mo modified for urea service.
- Connections: flanged ends with lens-type seal according to Customer's std., flanged DIN and ANSI standard.
- Pressure ratings: ANSI 900 to 2500, DIN and UNI PN 160 to 400.
- Packing box: double side, bolted type for adjustable loading of glass filled PTFE V-rings seal.
- Options: steam heating, etc.

DISC

- Construction: machined from forged block or bar only.
- Materials: special duplex stainless steel (HVD-1, Ferralium, etc.).
- Leakage class:
 - For 1-2311:
 - class II according to IEC 60534-4 (ANSI B16.104);
 - leakage class III with metal seated special execution (70° opening);
 - with calibrated orifice when minimum flow is required in closed position.
 - For 1-2611:
 - class IV according to IEC 60534-4 (ANSI B16.104);

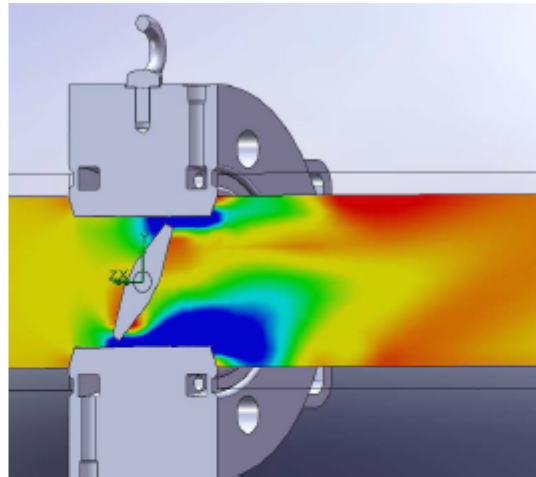


1-2311 SERIES CFD ANALYSIS

BEARINGS

- Style: metal bearings inside valve body, additional PTFE lined external bearings.
- Materials:
 - internal bearings: as per shaft ones with different hardness
 - external bearings: PTFE lined carbon steel.


SHAFT

- Materials: special duplex stainless steel (HVD-1, Ferralium, etc.).

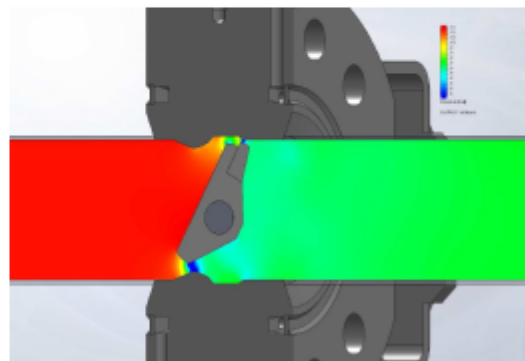

1-2611 SERIES CFD ANALYSIS

1-2311 series VALVE ASSEMBLY

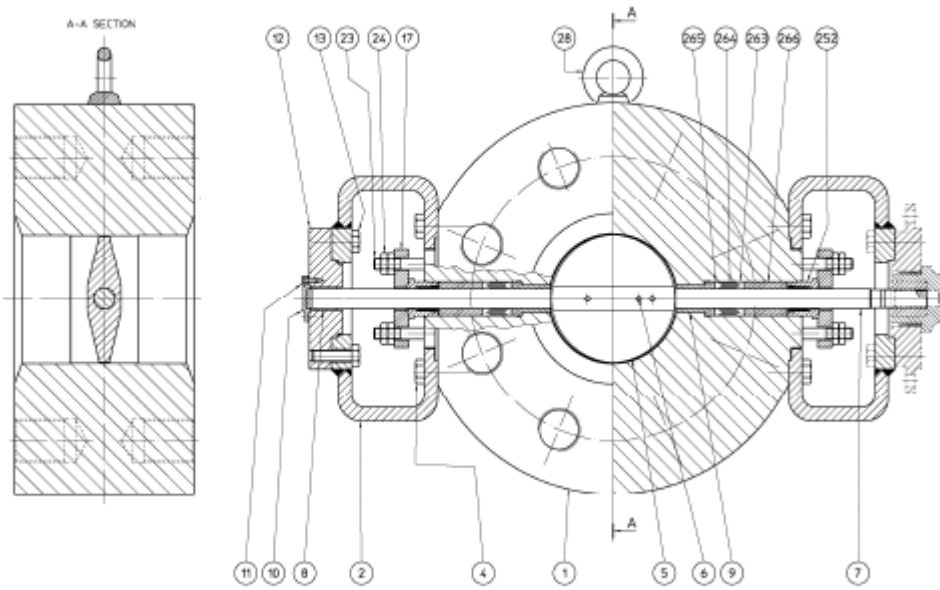


ITEM	PART NAME
1	BODY
2	ACTUATOR BACKET
4	SCREW
5	VANE
6	PIN
7	SHAFT
8	BUSHING
9	GUIDE BUSHING
10	COVER
11	SCREW
12	BLIND FLANGE

ITEM	PART NAME
13	SCREW
17	PACKING FLANGE
23	STUD
24	NUT
28	EYEBOLT
252	PACKING FOLLOWER
263	HEAD RING
264	SEALING RING
265	PACKING END RING
266	SPACER

(B)
(B)
(B)

(A)(B)
(A)(B)
(A)(B)

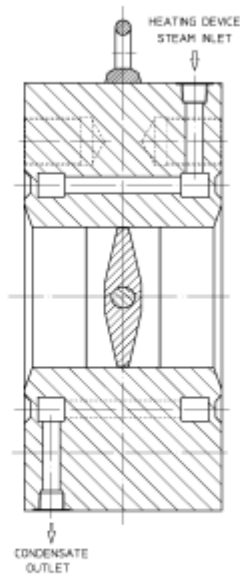

1-2311 HEATING DEVICE (OPTION H)

(A) STRATUP - COMMISSIONING SUGGESTED SPARE PARTS
 (B) STRATEGIC - TWO YEARS SUGGESTED SPARE PARTS

1-2311 series FLOW COEFFICIENT Cv ⁽¹⁾

DN in.	DN mm	Cv max 90°	Opening angle ⁽²⁾⁽³⁾								
			5°	10°	20°	30°	40°	50°	60°	70°	80°
4	100	300	2,5	3	8	20	41	70	116	183	254
6	150	850	9,5	10	23	56	115	199	329	518	721
8	200	1460	12,5	13	40	96	198	341	565	890	1238
10	250	2190	16	19,5	60	144	297	511	847	1335	1857

RECOVERY FACTOR F_L

DN in.	DN mm	F _L 90°	Opening angle								
			5°	10°	20°	30°	40°	50°	60°	70°	80°
4	100	0,58	0,95	0,95	0,94	0,91	0,88	0,81	0,74	0,67	0,61
6	150	0,54	0,95	0,95	0,93	0,90	0,84	0,78	0,71	0,63	0,57
8	200	0,54	0,95	0,95	0,93	0,90	0,85	0,78	0,71	0,63	0,57
10	250	0,59	0,95	0,95	0,93	0,90	0,87	0,83	0,78	0,72	0,65


PRESSURE DIFFERENTIAL RATIO FACTOR x_T

DN in.	DN mm	x _T	
		90°	10°
4	100	0,24	0,85
6	150	0,20	0,84
8	200	0,21	0,84
10	250	0,24	0,85

MAX DIFFERENTIAL PRESSURE ACROSS THE VALVE Δp - bar ⁽⁴⁾


Parcol Pneumatic actuator 1-X-271	Opening angle (°)		
	0 ÷ 30	60	80 ÷ 90
D33	30	30	9
D39	30	25	5
D46	30	18	4
D48	30	10	2

1-2311 FLOW CHARACTERISTIC

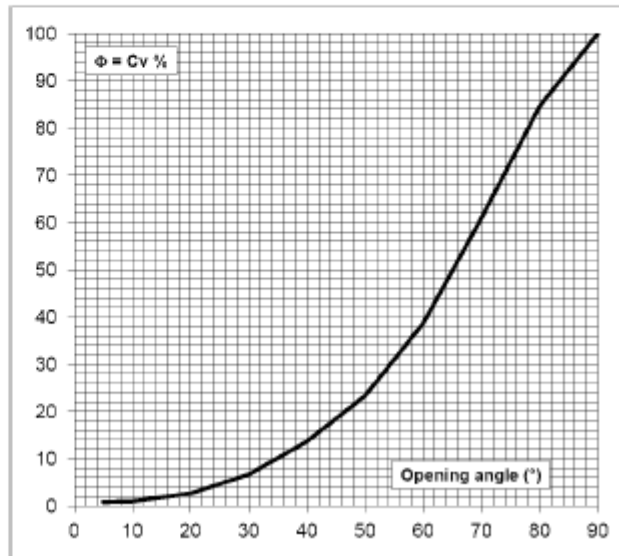

⁽¹⁾ Cv are expressed in U.S. gallons/min. of water with Δp=1 psi
⁽²⁾ Rangeability can be calculated as Cv max/Cv 5°
⁽³⁾ Tolerance according to IEC 60534-2-4
⁽⁴⁾ Intermediate values can be obtained by linear interpolation

1-2311 series OVERALL DIMENSIONS (mm) and WEIGHTS (kg)

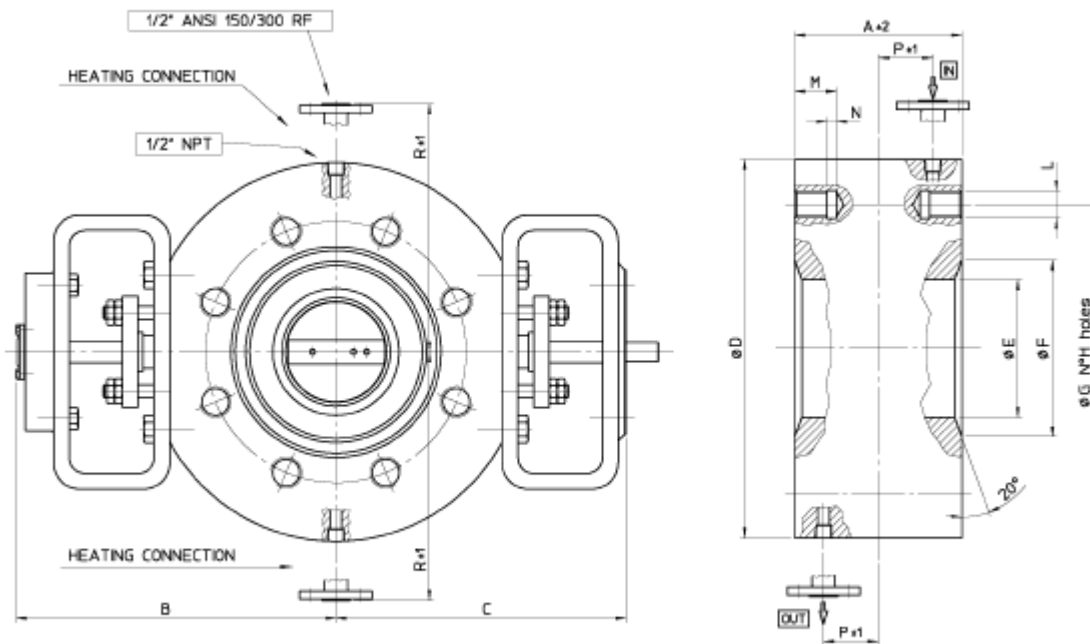


DN in.	Port mm	Parcol Pneumatic Actuator	A	B	C	D	E	F	G	H	L	M	N	P	R	WEIGHT
4	77,2	1-X-271 D33	140	244	218	290	77,2	103	185	8	1.1/8"	43	10	48	198	71
6	116	1-X-271 D39	160	279	253	350	116,4	152	255	8	1.1/2"	57	12	58	228	113
8	152,8	1-X-271 D46	185	342	307	440	153,1	196	320	8	1.7/8"	72	14	71	273	207
10	190	1-X-271 D46	225	384	349	520	190,4	241	380	8	2"	90	14	91	313	342

Above dimensions and weights refer to valves flanged PN 325 with lenticular gasket. Dimensions and weights can change depending on licensor applicable standards.



1-2311 VALVE WITH PARCOL 1-X-271 PNEUMATIC DIAPHRAGM ACTUATOR PROVIDED WITH TOP-MOUNTED HANDWHEEL (OPTIONAL)

4-3111 THREE WAYS BALL VALVE

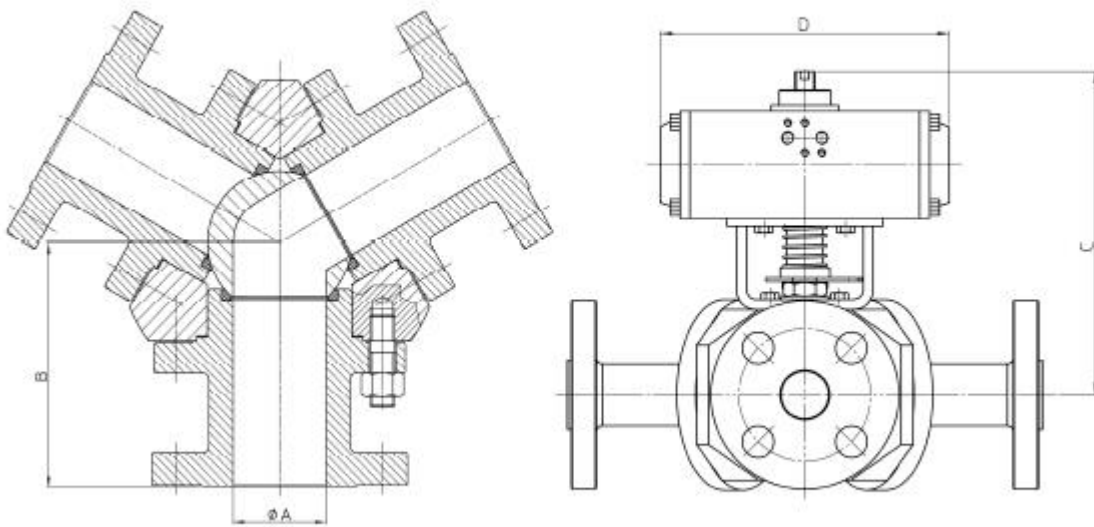


OVERALL DIMENSIONS (mm) AND WEIGHTS (kg)

DN	ANSI	ØA	B	C	D	WEIGHT
1"	150	24	95	190	205	32
	300					
1.1/2"	150	38	110	300	251	40
	300		130			53
2"	150	48	120	300	251	55
	300		150			69
3"	150	75	150	320	430	87
	300		200			122
4"	150	94	165	360	430	117
	300		215			146




4-3111 VALVE WITH PNEUMATIC ACTUATOR

1-X-210 series DIAPHRAGM ACTUATOR

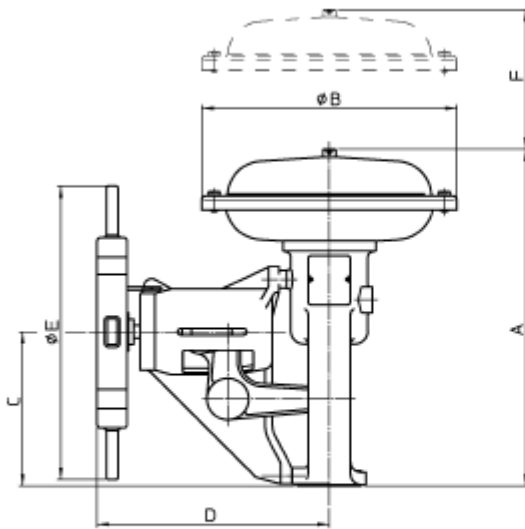

WITH SIDE-MOUNTED HANDWHEEL (OPTION)

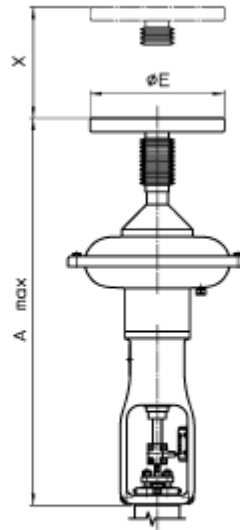


WITH TOP-MOUNTED HANDWHEEL (OPTION)

OVERALL DIMENSIONS (mm) AND WEIGHTS (kg)

TYPE	A		F	B	Side handwheel			Top handwheel			
	DIRECT ⁽¹⁾	REVERSE ⁽¹⁾			C	D	E	A max		E	X
								DIRECT ⁽¹⁾	REVERSE ⁽¹⁾		
D250	398	461	150	266	200	300	380	570	665	175	150
D310	412	494	150	325	200	300	380	590	700	225	150
D390	511	662	200	400	241	360	470	795	965	300	200
D450	584	750	250	482	252	365	470	925	1080	400	250
D600	754	954	300	631	330	455	570	-	-	-	-


TYPE	ACTION ⁽¹⁾	WEIGHT		
		Standard	Side handwheel	Top handwheel
D250	DIRECT	15	25	20
	REVERSE	16	26	22
D310	DIRECT	16	26	21
	REVERSE	19	29	25
D390	DIRECT	29	48	41,5
	REVERSE	39	58	54
D450	DIRECT	48	67	60,5
	REVERSE	63	82	78
D600	DIRECT	100	135	-
	REVERSE	130	165	-

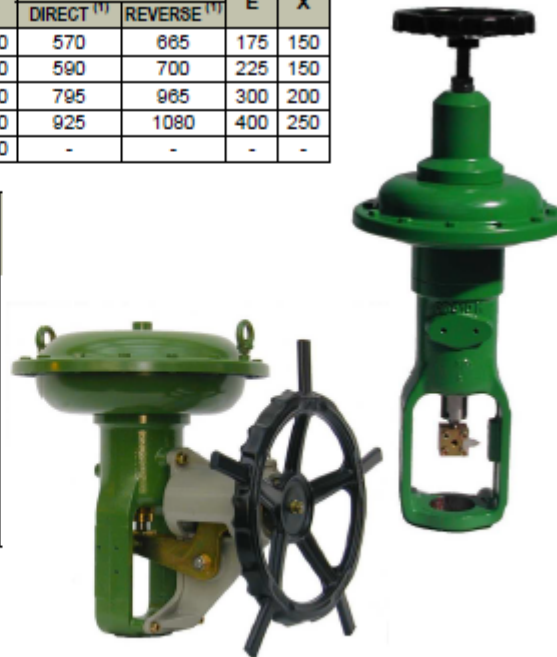

1-X-210 SERIES PNEUMATIC DIAPHRAGM ACTUATORS PROVIDED WITH TOP-MOUNTED AND SIDE-MOUNTED HANDWHEEL (OPTIONAL)

⁽¹⁾ DIRECT = 1-X-211; REVERSE = 1-X-212


1-X-430 series PNEUMATIC CILYNDER ACTUATOR OVERALL DIMENSIONS (mm) and WEIGHTS (kg)

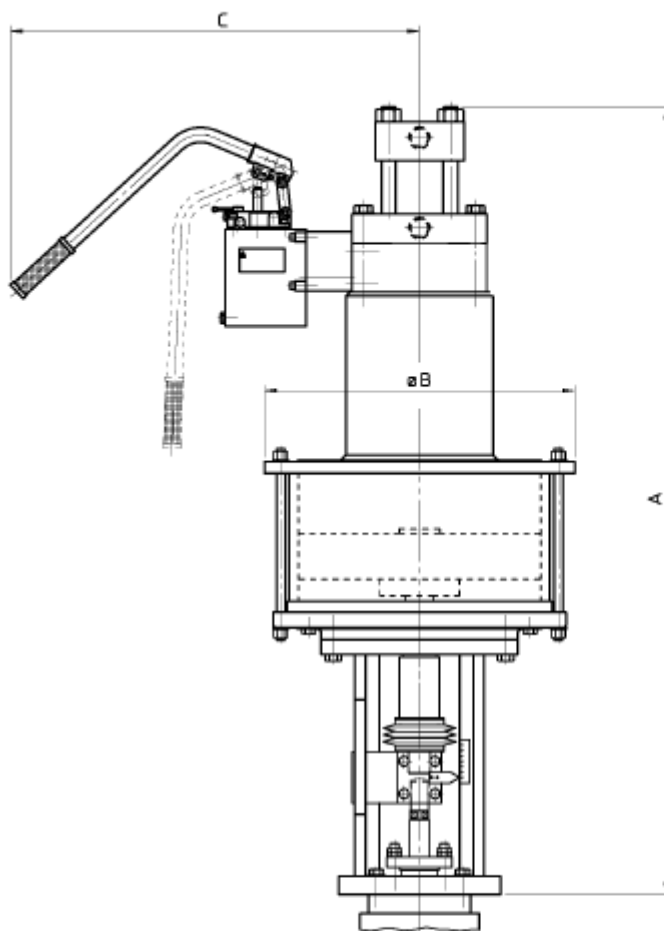


TYPE	CYLINDER STROKE mm	VALVE STROKE mm	A	B	C	WEIGHT ⁽¹⁾
C450	100	< 45	1459	575	905	280
C600	100	< 78	1618	748	905	690

⁽¹⁾ Without hydraulic manual operator

1-X-430 series PNEUMATIC CYLINDER ACTUATOR OVERALL DIMENSIONS (mm) and WEIGHTS (kg)

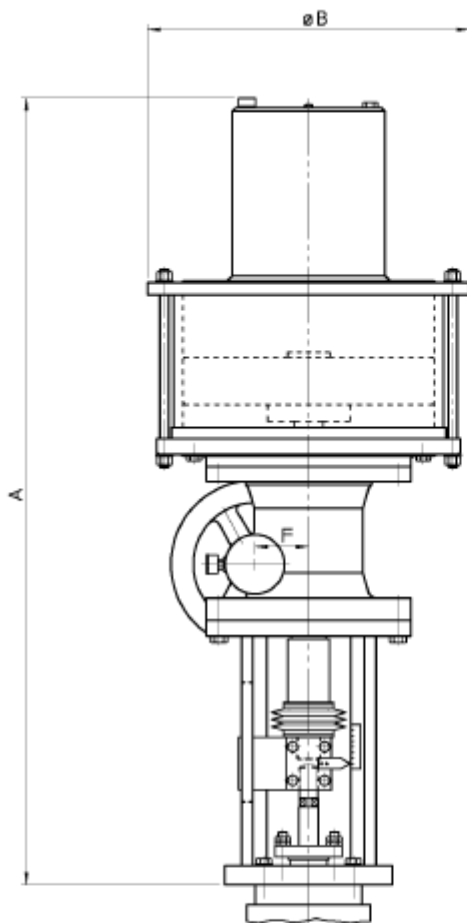

1-X-432 SERIES PNEUMATIC CYLINDER ACTUATOR PROVIDED WITH SIDE-MOUNTED HANDWHEEL (OPTIONAL)



TYPE	CYLINDER STROKE mm	VALVE STROKE mm	A	B	C	E	F	WEIGHT ⁽¹⁾
C450	100	< 45	1409	575	350	300	96	280
C600	100	< 76	1580	748	380	375	118	690

⁽¹⁾ Without handwheel operator

1-X-271 SERIES PNEUMATIC DIAPHRAGM ACTUATORS

1-X-271 series rotary pneumatic diaphragm actuator is normally installed on PARCOL rotary valves (0°-90°). D25, D33, D39, D46 and D63 sizes are available.

Floating stem construction minimizes frictions and backlash and significantly reduces mass and dimensions.

The spring is preloaded in a suitable case, to make diaphragm replacement safer and simpler.

The design allows replacing the actuator without disassembling the valve or part of it.


Standard diaphragm settings are 3÷15 psi (0.2÷1 bar), 6÷30 psi (0.4÷2 bar), 20÷44 psi (1.4÷3 bar) with 20÷50 psi (1.4÷3.5 bar) supply in air-to-open and air-to-close flow directions.

Other spring ranges are available on request.

Max operating pressure = 3.5 bar (50 psig). Should this pressure limit be exceeded, internal parts of actuator can be permanently deformed.

The case and the relevant joints can withstand a pressure of 10 bar at least without significant permanent deformations (PED certification: PS = 6 bar).

Bursting pressure = over 30 bar.

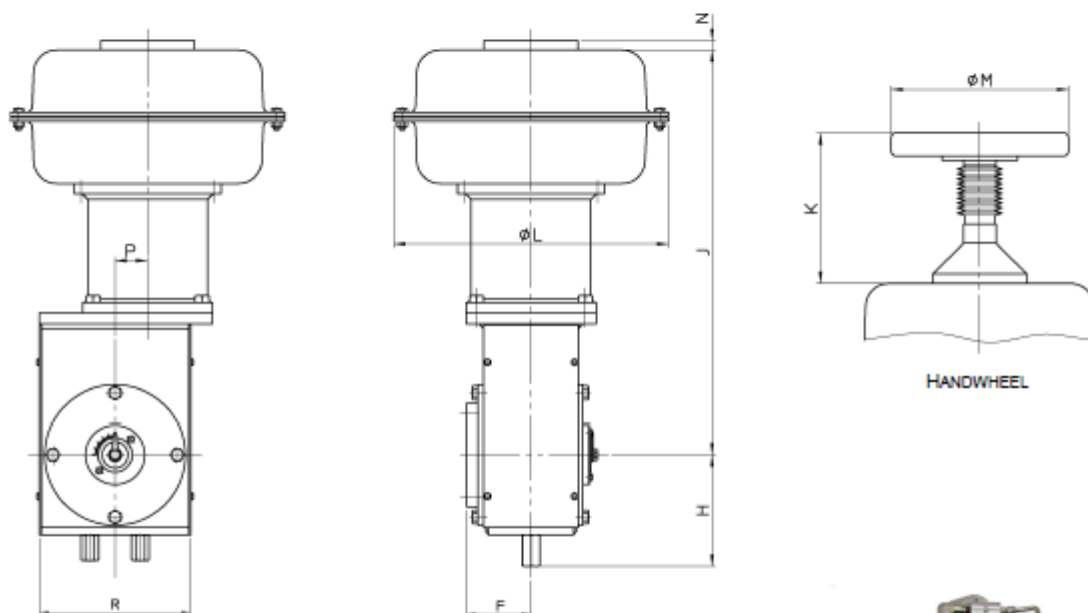


OVERALL DIMENSIONS (mm) AND WEIGHTS (kg)

1-X-271 ACTUATOR	F	H	J	K	L	M	N	P	R	WEIGHT ⁽¹⁾
D25	65	112	432	220	262	175	21	29	140	28
D33	78	140	538	255	333	225	21	36	170	50
D39	96	170	639	343	395	300	24	46	224	85
D46	109	190	731	397	465	400	24	55	250	140
D63	155	275	836	520	640	570	21	72	300	180

⁽¹⁾ Without handwheel operator


1-X-271 SERIES PNEUMATIC DIAPHRAGM ACTUATOR PROVIDED WITH STROKE LIMITOR



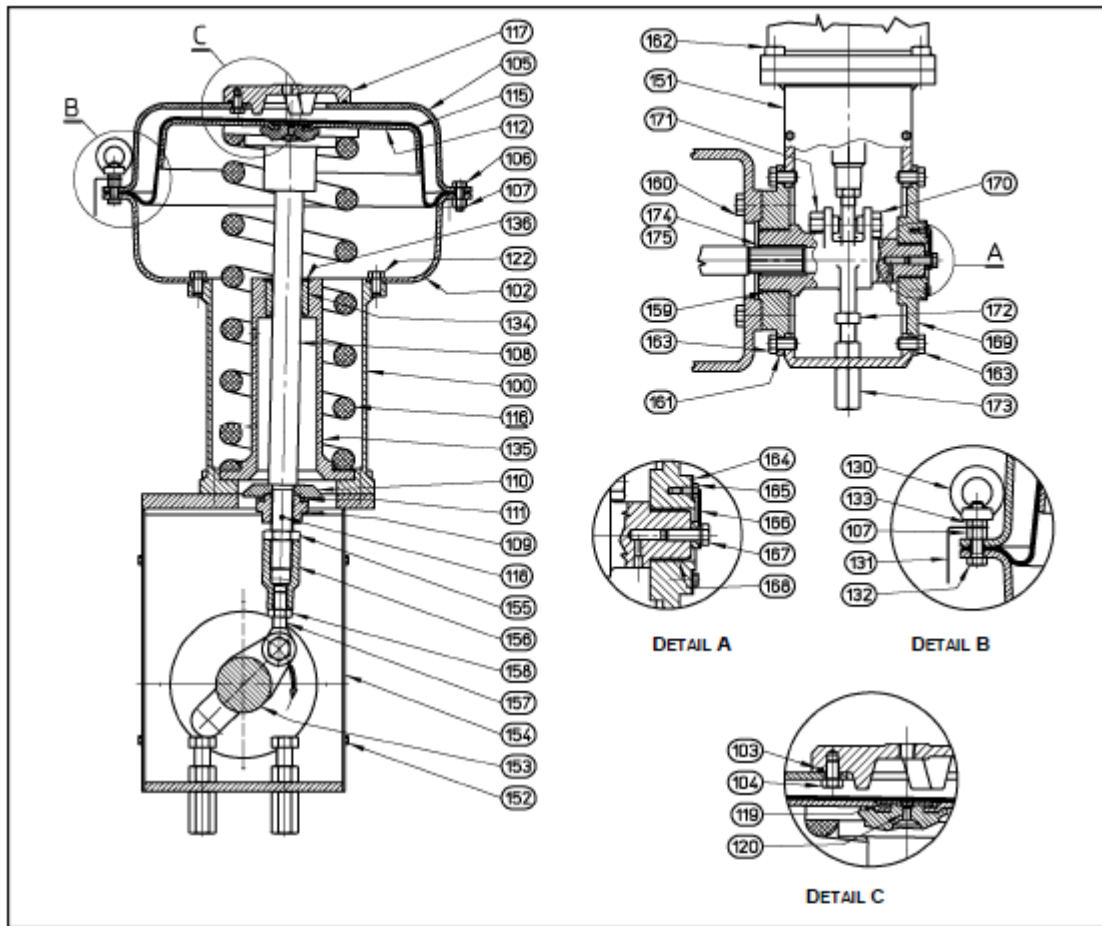

1-X-271 SERIES D33-D46 TYPE DIAPHRAGM ACTUATOR

ITEM	PART NAME	ITEM	PART NAME
100	SPRING CASE	136	STOP RING
102	LOWER DIAPHRAGM CASE	151	YOKE
103	"O" RING	152	SCREW
104	SCREW	153	LEVER
105	TOP DIAPHRAGM CASE	154	SIDE COVER
106	SCREW	155	NUT
107	NUT	156	SCREW COUPLING
108	STEM AND SPRING GUIDE	157	LEFT THREADED BALL JOINT
109	CLAMPING NUT	158	NUT
110	SPACER	159	BEARING
111	BEARING	160	SCREW
112	DIAPHRAGM PLATE	161	COVER
115	DIAPHRAGM	162	SCREW
116	SPRING	163	SCREW
117	CAP	164	PLATE
118	SPRING	165	SCREW
119	WASHER	166	TRAVEL INDICATOR
120	SCREW	167	SCREW
121	SPACER RING	168	BEARING
122	SCREW	169	COVER
130	EYEBOLT	170	SCREW
131	EYEBOLT PLATE	171	NUT
132	SCREW	172	SCREW
133	NUT	173	NUT
134	GUIDE BUSHING	174	BUSHING
135	LOWER SPRING SEAT	175	PIN

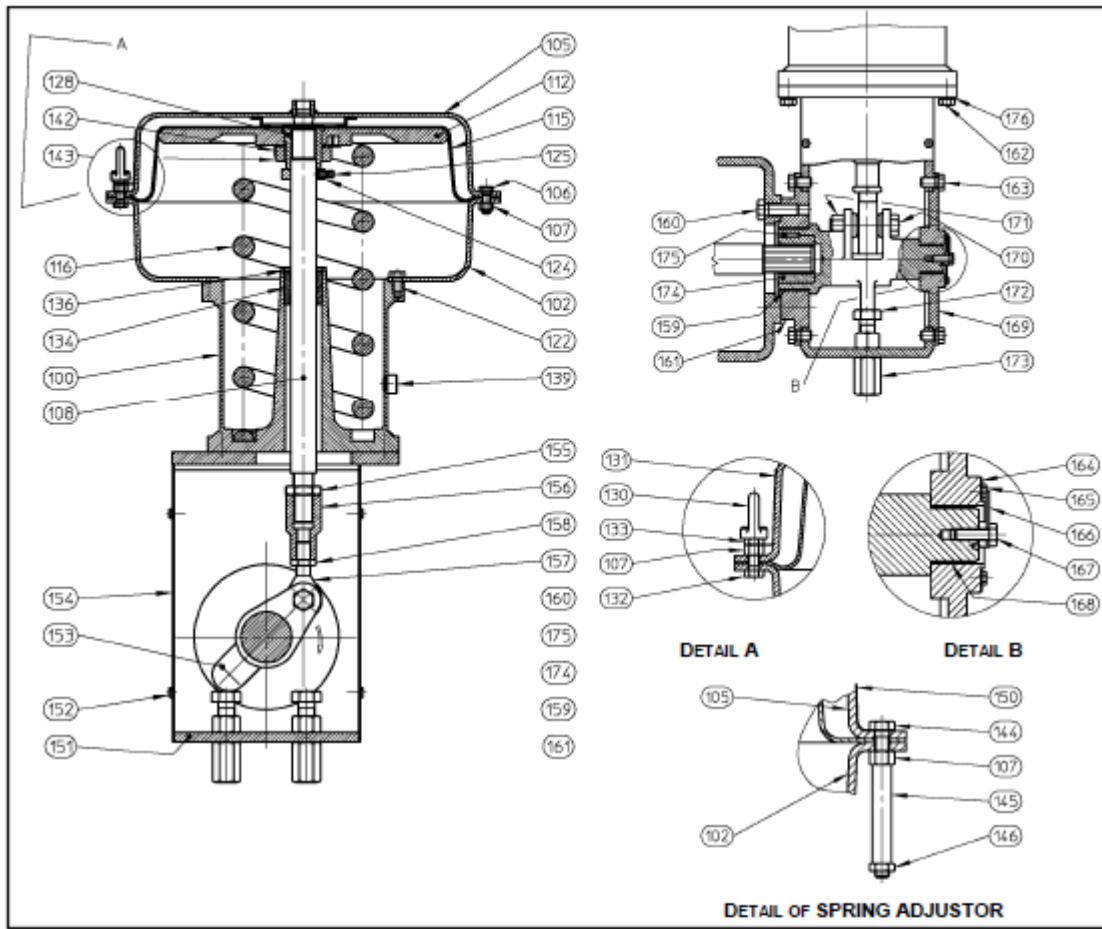

1-X-271 SERIES D63 TYPE DIAPHRAGM ACTUATOR

ITEM	PART NAME	ITEM	PART NAME
100	YOKE	151	ACTUATOR SUPPORT
102	LOWER DIAPHRAGM CASE	152	SCREW
105	UPPER DIAPHRAGM CASE	153	LEVER
106	SCREW	154	SIDE COVER
107	NUT	155	NUT
108	STEM	156	JOINT
112	DIAPHRAGM PLATE	157	BALL JOINT
115	DIAPHRAGM	158	NUT
116	SPRING	159	BEARING
122	SCREW	160	SCREW
124	STROKE LIMITER	161	COVER
125	SCREW	162	SCREW
128	NUT	163	SCREW
130	EYEBOLT	164	PLATE
131	EYEBOLT PLATE	165	SCREW
132	SCREW	166	TRAVEL INDICATOR
133	NUT	167	SCREW
134	GUIDE BUSHING	168	BEARING
136	STOP RING	169	COVER
139	VENT PLUG	170	SCREW
142	WASHER	171	NUT
143	CLAMPING NUT	172	SCREW
144	SPRING ADJUSTOR	173	NUT
145	THREADING PROTECTION	174	BUSHING
146	NUT	175	PIN
150	PLATE	176	WASHER

